


Lionweld Kennedy Safedeck closed flooring system comprises of a Safegrid or Safegrate open bar grating sub-structure with a durbar plate welded to the top surface.

Safedeck provides a greater load bearing capacity when compared to open bar grating or plated flooring offered individually. The weight to strength ratio provides a cost efficient solution to a closed flooring requirement.

Safedeck is available as standard with load bearing bars at 41mm centres and transverse bars at 100mm centres. Durbar thickness is usually 3mm.

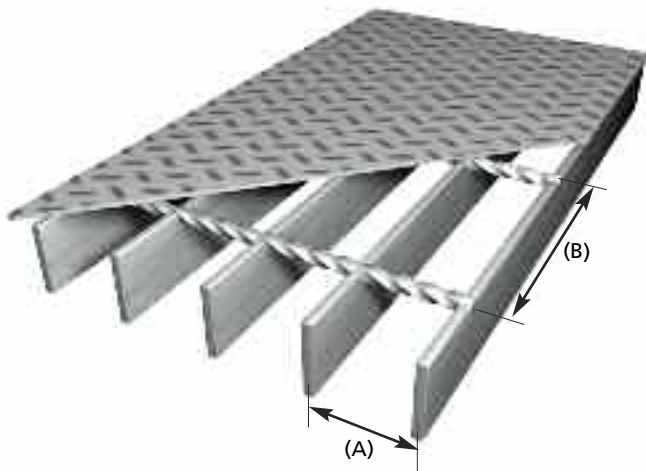

Safedeck with 3mm durbar floorplate

Load Bearing Bar Centres (A)	Transverse Bar Centres (B)
W (41mm)	100 (mm)
N (30mm)	100 (mm)

Fixings Recommended for Safetread flooring:

Positive Fixing

- Fixing pads
- Drilled and Screwed

