



safegrid

Lionweld Kennedy Safegrid open bar grating comprises of a series of parallel flat load bearing bars at equal spacings.

The load bearing bars are held upright at regular spaced intervals by 6mm square twisted transverse bars that are resistance welded into the top surface.

The transverse bars are assumed not to contribute to the load carrying capabilities of the load bearing bars.

Safegrid is our standard and most common type of flooring.

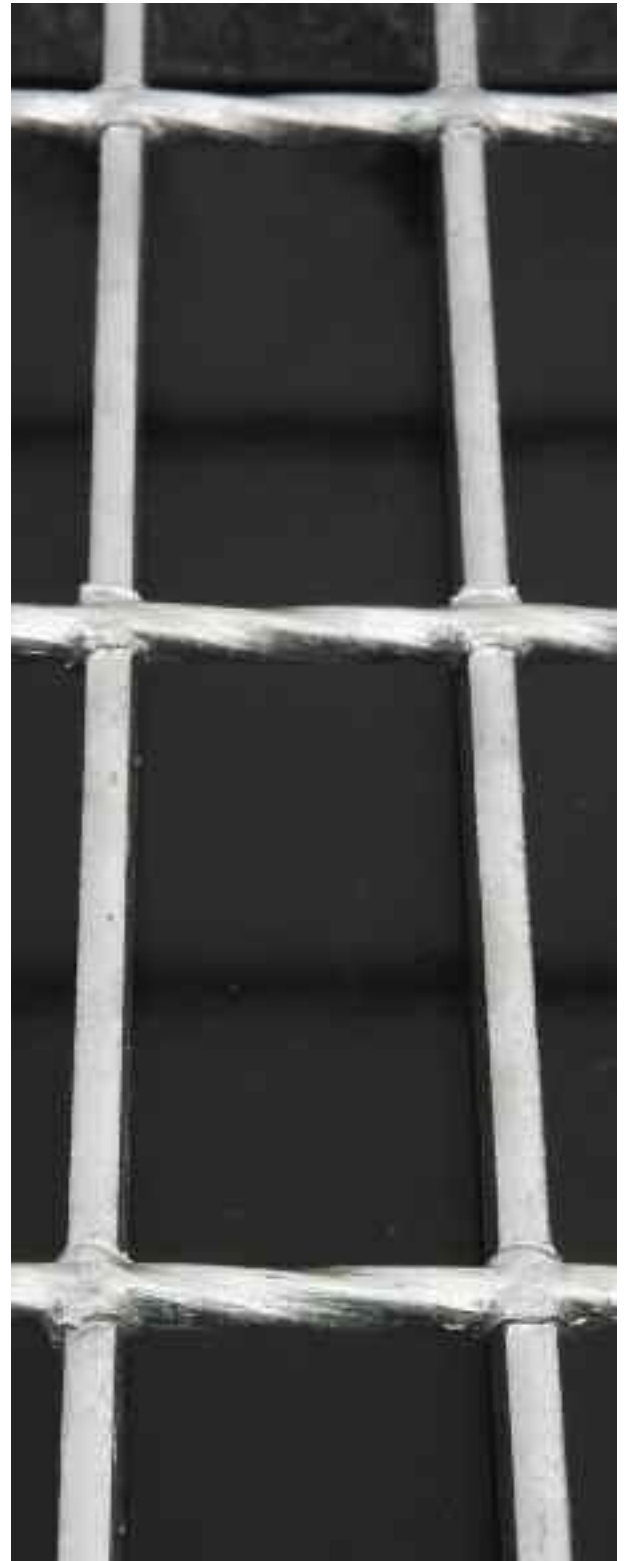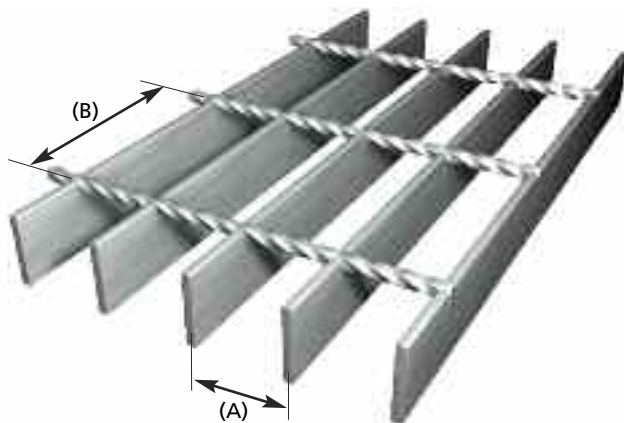

| Safegrid | |
|---|----------------------------|
| Load Bearing bar centres (A) | Transverse bar centres (B) |
| W (41mm) | 50 , 100 (mm) |
| N (30mm) | 50 , 100 (mm) |
| E (33mm) | 50 , 100 (mm) |
| NX (20mm) | 50 , 100 (mm) |
| Surfaces Available <small>see page 06</small> | |
| Plain | |
| Rolled Serrated | |
| Machine Serrated | |
| Landed Flat | |

Fixings Recommended for Safegrid Flooring:

Removable Fixing

- Saddle Clip
- Narrow Clip (type NX only)
- Universal Deep Saddle Clip

Positive Fixing

- Deep Saddle with self tapping bolt
- Fixing pads