



# safelock

Double serrated Safelock is the most slip resistant flooring in the Lionweld Kennedy range.

Upright load bearing bars are fixed at regular spaced intervals by 13mm x 13mm x 3mm inverted angles, pressure locked into the bearing bars.

Commonly used in extreme conditions such as offshore applications or areas where lubricants are regularly used.

Safelock is usually supplied with a double serrated finish to provide optimum slip resistance. Other surfaces available on request.

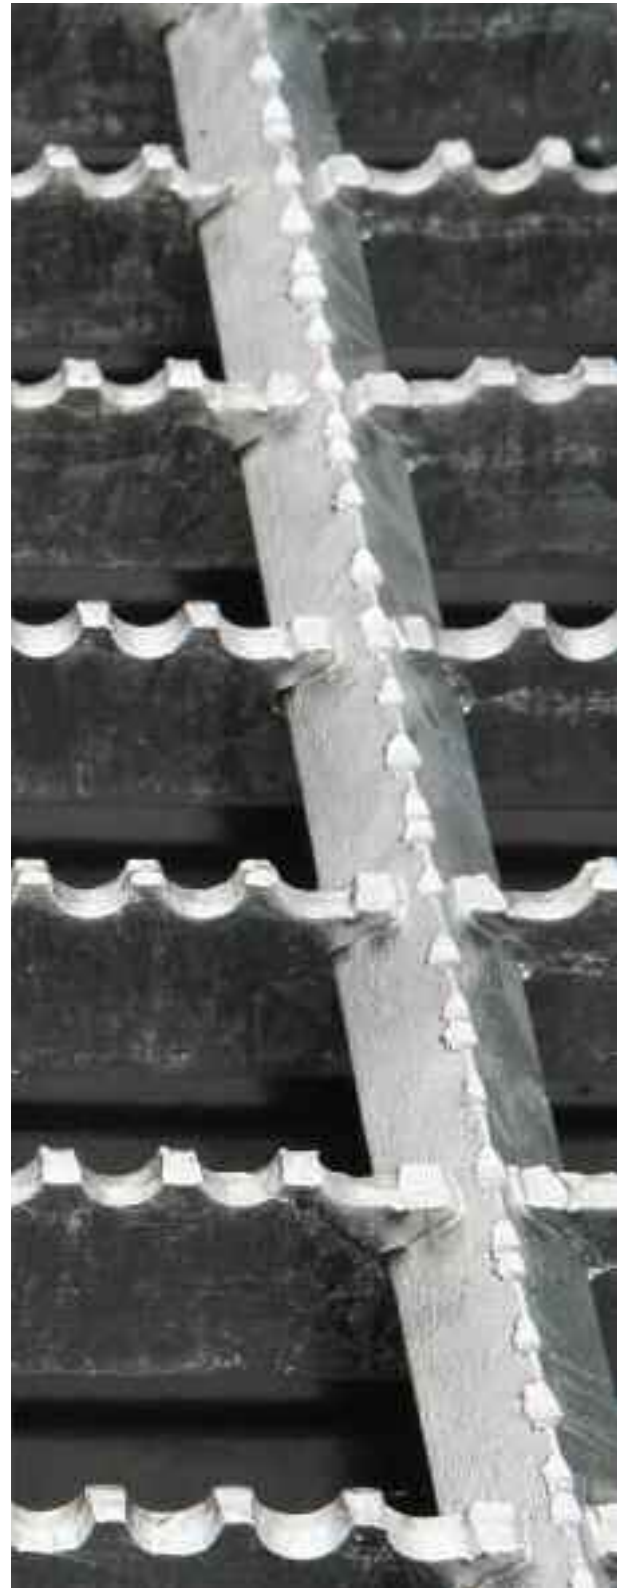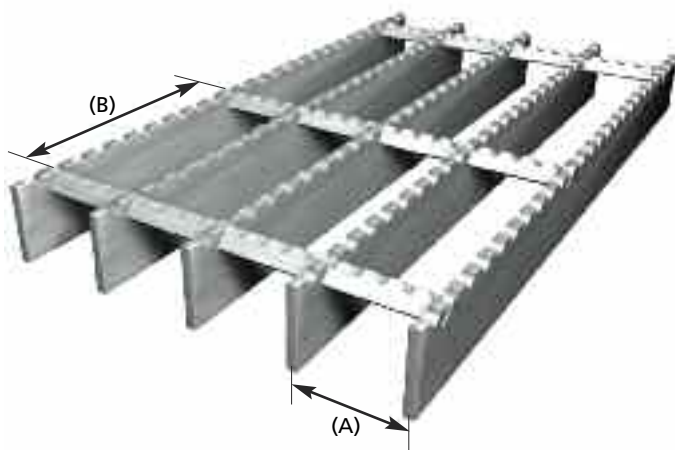

Safelock	
Load Bearing bar centres (A)	Transverse bar centres (B)
N (30mm)	100 (mm)
W (41mm)	
Load Bearing Bars range from 25mm - 50mm deep	
Surfaces Available <small>see page 06</small>	
Plain	
Double Serrated	

## Fixings Recommended for Safelock flooring:

### Removable Fixing

- Saddle Clip
- Universal Deep Saddle Clip

### Positive Fixing

- Deep Saddle with self tapping bolt
- Fixing pads