


# safety grating

Lionweld Kennedy Safety Grating is designed to prevent a 15mm ball from passing through the flooring.

Safety Grating is a variation of safegrid flooring with a 9mm intermediate round bar welded to the underside of the transverse bars.

Safety Grating is usually supplied with a serrated surface and is used in varying applications where it is necessary to prevent small objects such as nuts, bolts and tools from passing through the flooring.

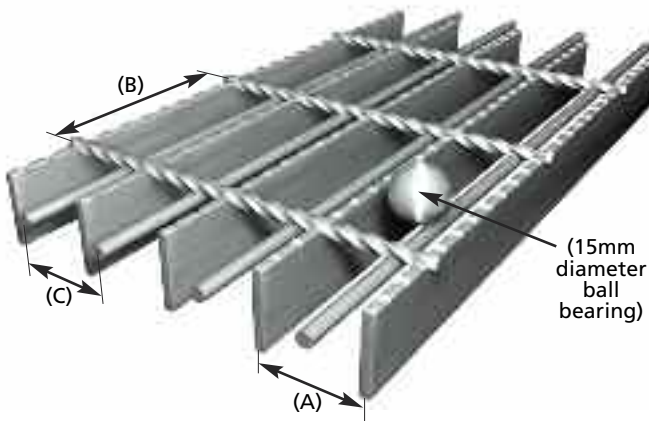

| Safety Grating                                |                            |                             |
|---|----------------------------|-----------------------------|
| Load Bearing bar centres (A)                  | Transverse bar centres (B) | Round Bar (9mm) centres (C) |
| W (41mm)                                      | 50 , 100 (mm)              | 41mm                        |
| N (30mm)                                      | 50 , 100 (mm)              | 30mm                        |
| Surfaces Available <small>see page 06</small> |                            |                             |
| Plain   |                            |                             |
| Rolled Serrated                               |                            |                             |
| Machine Serrated                              |                            |                             |
| Landed Flat                                   |                            |                             |

## Fixings Recommended for Safety Grating:

### Removable Fixing

- SG1 Clip

### Positive Fixing

- Fixing pads